



TERMINAL STRAPPING T1

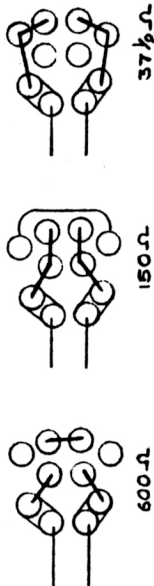

TERMINAL STRAPPING T2

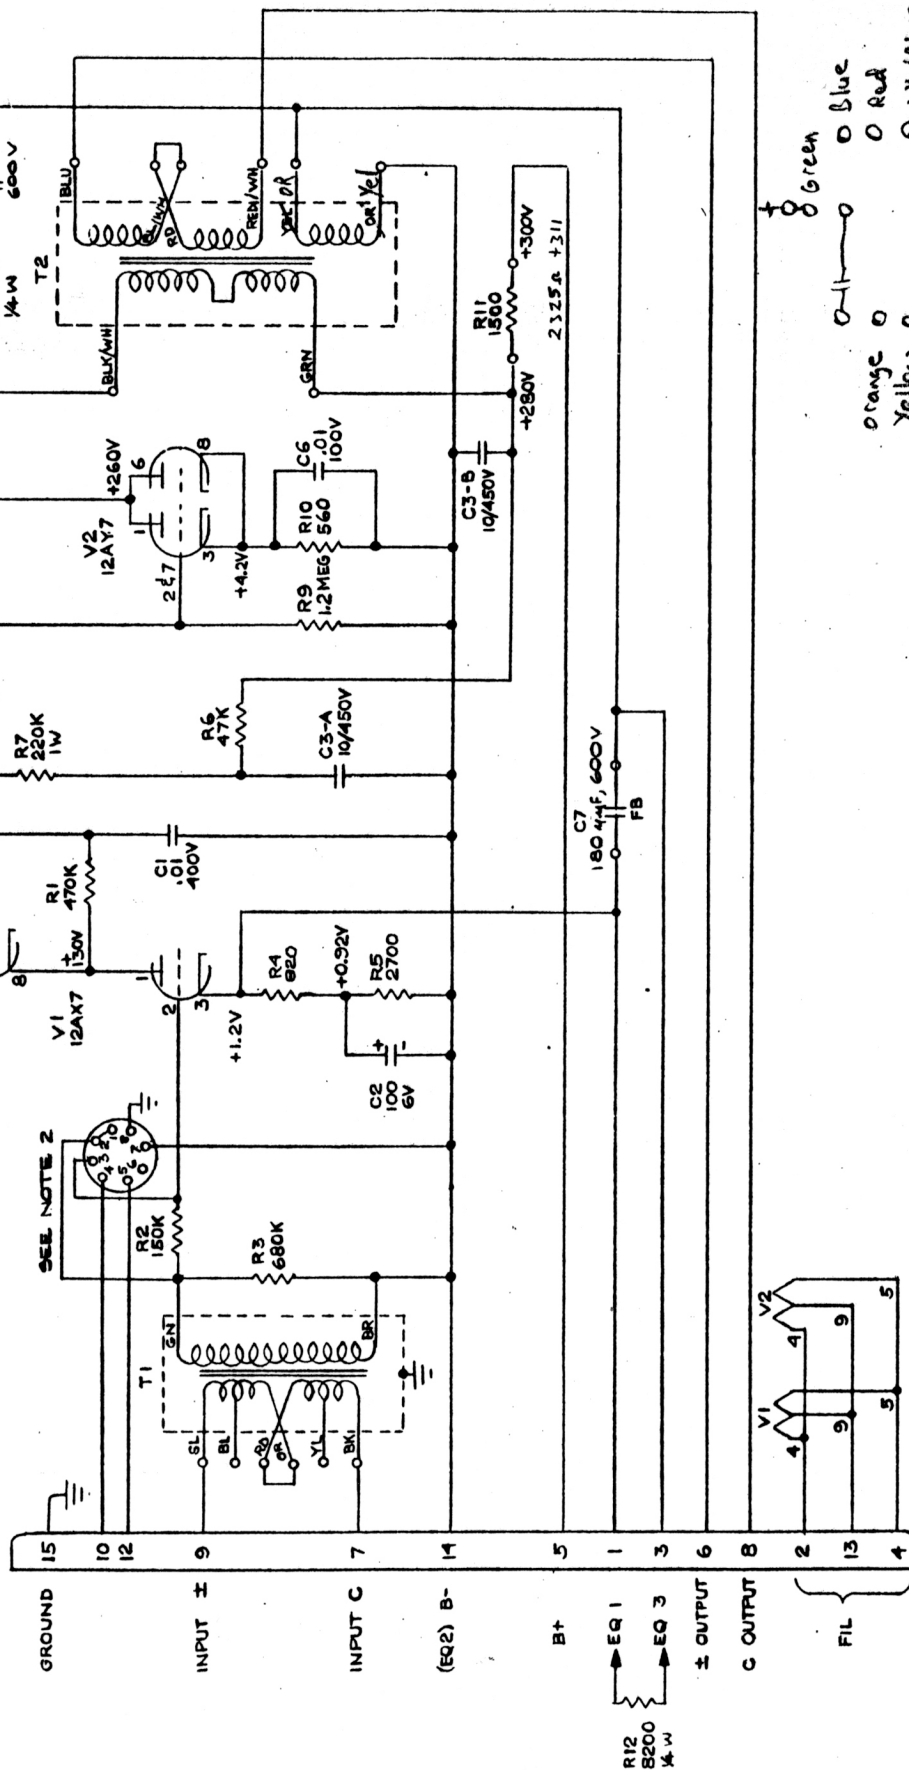

NOTE:

1. ALL RESISTANCE VALUES IN OHMS, 1/2W, 5%.
2. GAIN CONTROL RECEPTACLE FOR 1008 LDR.
3. WHEN 500 EQUALIZER IS NOT USED, THE 8200 OHM RESISTOR R12 MUST BE MOUNTED AS INDICATED ON THE RECEPTACLE OR ACROSS "FB" TERMINALS IN AMPLIFIER.
4. FILAMENTS DC & BIASED 60-75V POSITIVE ABOVE GROUND, BYPASSED BY 150μF MIN.

Orange 0
Yellow 0
Blk/Wk 0
Green 0
Blue 0
Red 0
Wh/Blue 0
Wh/Red 0

12AY7

UNIVERSAL AUDIO DIV.
STUDIO ELECTRONICS CORP.
11922 VALERIO ST.
NO. HOLLYWOOD, CALIF. 91605

MICROPHONE PREAMPLIFIER
MODEL 1008
(SERIAL NO. 996 AND HIGHER)
DRAWN: MRC-3/6/57
CHECKED: J. J. J.
APPROVED: J. J. J.

C-1062