

***DSL 100 & DSL 50***  
***Valve Heads***

**JCM 2000**



### *From Jim Marshall*

I would like to personally thank you for selecting one of our JCM 2000 Dual Super Lead valve heads.

Since I started Marshall Amplification in 1962 I have witnessed some incredible breakthroughs and advances in amplifier design technology, such as master volume amps, switchable channels, reverb, MIDI technology, speaker emulation and digital effects processing, to name just a few. These may seem like every day features nowadays but this certainly wasn't always the case. However, the same values that were present in the first Marshalls are still here today. That is, solid workmanship, reliability, stylish looks and above all great Marshall tone.

The DSL 100 and DSL 50 are our latest all valve heads and as such are really direct descendants of our classic all valve heads. Combining all of the aforementioned values plus a few extra attributes such as versatility, switchable channels, reverb, a big sound and of course, I am proud to say, all of the magical Marshall tone that you could want. The JCM 2000 range is truly a testament to the Marshall legacy of great guitar products.

I would like to wish you every success with all of your musical endeavours and also your new Marshall JCM 2000 Dual Super Lead valve head, which I am sure you will find a pleasure to play for many years to come.

Yours Sincerely,

# Marshall



## WARNING! - Important safety instructions

### WARNING: This apparatus must be earthed!

- A **PLEASE** read this instruction manual carefully before switching on.
- B **ALWAYS** use the supplied mains lead, if a replacement is required please contact your authorised Marshall Dealer.
- C **NEVER** attempt to by-pass the fuses or fit ones of the incorrect value.
- D **DO NOT** attempt to remove the amplifier chassis, there are no user serviceable parts.
- E **Refer all servicing to qualified service personnel including replacement of fuses and valves.**  
Servicing is required when the apparatus has been damaged in any way, such as when the power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally or has been dropped.
- F **NEVER** use an amplifier in damp or wet conditions. No objects filled with liquids should be placed on the apparatus.
- G **ALWAYS** unplug this apparatus during lightning storms or if unused for long periods of time.
- H **Protect** the power cord from being walked on or pinched particularly at plugs, convenience receptacles and at the point where they exit from the apparatus.
- I **DO NOT** switch the amplifier on without the loudspeaker connected.
- J **ENSURE** that any extension cabinets used are of the correct impedance.

ⓘ **Note:** This equipment has been tested and found to comply with the requirements of the EMC directive (Environments E1, E2 and E3 EN 55103-1/2) and Low Voltage directive in the E.U.

**EUROPE ONLY - Note:** The Peak Inrush current for the DSL50 is 33 amps and DSL100 is 40 amps.

ⓘ **Caution:** Any changes or modifications not expressly approved by the party responsible for compliance may void the user's authority to operate the equipment.

ⓘ **Note:** It is recommended that all audio cables, with the exception of the speaker lead, used to connect to the DSL50 and DSL100 are of a high quality screened type. These should not exceed 10 metres in length.

Always use a non-screened Marshall approved speaker lead with the DSL50 or DSL100 and extension cabinets.

ⓘ **WARNING:** Do not obstruct ventilation grilles and always ensure free movement of air around the amplifier!



**USA ONLY - DO NOT** defeat the purpose of the polarised or grounding type plug. A polarised plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong is provided for your safety. When the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.

**Follow all instructions and heed all warnings - KEEP THESE INSTRUCTIONS !**

## JCM 2000 Introduction


The Marshall **1959 Super Lead Plexi** head and the **JCM 800 Master Volume 2203** are recognised the world over as benchmarks in tone, feel, musical power and sheer size of sound. Imagine then, an amp which is like two footswitchable 1959 Super Leads in one, with the addition of reverb plus extra gain to take you into 2203 territory and beyond. If this sounds like a dream, it is no longer - now that the JCM 2000 Dual Super Lead range is here.

The 100 Watt DSL 100 and 50 Watt DSL 50 Dual Super Lead heads feature two footswitchable channels, Classic Gain / Channel A and Ultra Gain / Channel B. As the names imply, each channel has a very different character, with Classic Gain / Channel A taking you from a clean to crunch 1959 and then, via a mode switch, up to a 2203 style brute. Ultra Gain / Channel B takes you from a hot rodded 2203, via a mode switch, to a higher gain response with the addition of mid-boost. Each channel also has its own individual Reverb level.

The amps also feature a Deep Switch and Tone Shift which are common to both channels. The Deep Switch adds a resonant bass boost to your sound without muddying it up, while the Tone Shift selector shifts out the mid frequencies making the amp ideal for brutal metal tones, especially when combined with high gain settings. Their all round versatility and sheer size of sound make the DSL 100 and DSL 50 superb performance tools for today's most demanding playing situations and you can rest assured they are packed full of the famed Marshall TONE.

Please read this handbook carefully before plugging in.

# DSL 100 & DSL 50 Front Panel functions

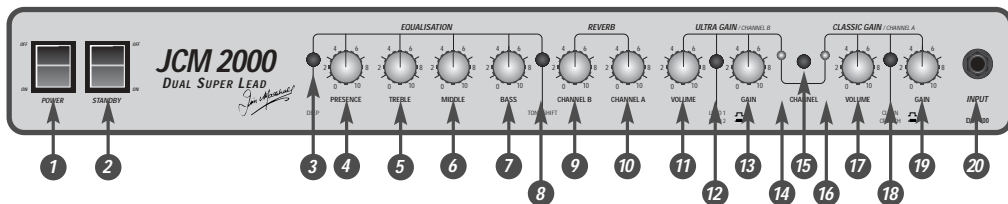

## 1. Power Switch

On / Off Switch for mains power to the amplifier.

## 2. Standby Switch

Controls H.T. or high voltage to the valves to allow them to attain correct working temperature before playing. To prolong the life of the valves it is always advisable to switch on the Mains Power Switch (item 1) about 2 minutes before switching on the Standby (item 2).

On switching off, the Standby should always be switched before the Power Switch.

The standby facility is particularly useful between sets and before playing, as it allows you to keep the valves operating at a functional temperature but without any sound being produced.

## 3. Deep Switch

The Deep Switch adds a tuned or resonant bass boost to your sound, increasing bottom end thud, without making your tone woolly around the all important low end.

## 4. Presence Control

Adds higher frequencies to the guitar tone, creating crispness and bite. Turning this up will make the sound more cutting and in your face.

## 5. Treble Control

Controls the high frequencies of the guitar tone, making your guitar sound brighter when increased.

## 6. Middle Control

Dictates the middle register of the amplifier. Turning this up will make your guitar sound fatter. Conversely reducing the amount of middle in your tone will result in a sharper and thinner guitar sound for the classic “scooped” tone.

## 7. Bass Control

Controls the amount of low frequencies or bottom end in your tone.

## 8. Tone Shift

The Tone Shift Switch reconfigures the tone network components to give a new dimension to passive tone shaping. With the switch selected to the “in” position and the Middle Control (item 6) turned down the result is a scooped mid sound ideal for certain classic metal styles.

## Reverb

### 9. Channel B

Controls the reverb level on Channel B.

### 10. Channel A

Controls the reverb level on Channel A.

## Ultra Gain / Channel B

### 11. Volume

Governs the volume level of Channel B.

### 12. Lead 1 / Lead 2 Switch

The DSL 100 and DSL 50's Channel B features two modes. The first, Lead 1, gives an open high gain crunch, with traditional Marshall characteristics, similar to a hot-rodded **JCM 800 2203 master volume**. The Lead 2 mode however gives a mid-boosted tone coupled with even higher gain possibilities.

### 13. Gain

Controls the gain level for Channel B. As the amount of gain increases so will the distortion level in your sound.

### 14. LED

Indicates when Channel B has been selected.

### 15. Channel Switch

Selects Channel A or Channel B.

### 16. LED

Indicates when Channel A has been selected.

## Classic Gain / Channel A

### 17. Volume

Governs the volume level of Channel A

### 18. Clean / Crunch

As with Channel B, Channel A features two modes. The first, Clean, is reminiscent of an early 1959 Plexi Super Lead head. Depending on Gain settings (item .19) this mode will take you from clean to a controlled Plexi style crunch. Crunch will take you up to a **JCM 800 2203** style grind.


### 19. Gain

Controls the gain level for Channel A. As the amount of gain increases so will the distortion level in your tone.

### 20. Input

Jack input for guitar.

## DSL 100 & DSL 50 Rear Panel functions

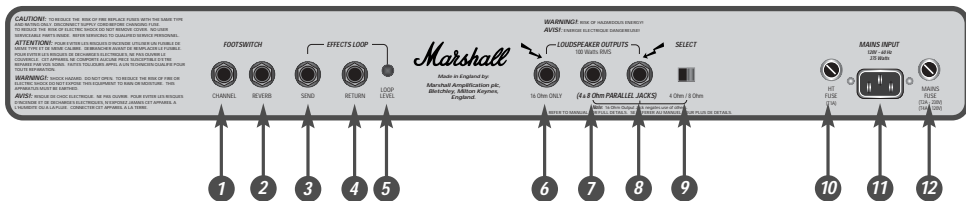

### Footswitch

#### 1. Channel

By connecting the supplied PED801 footswitch to this jack it is possible to footswitch between Channel A and Channel B. The footswitch will override the front panel Channel switch position (item 15).

#### 2. Reverb Footswitch

By connecting another PED801 footswitch (optional) to this jack it is possible to remotely switch reverb on and off.

### Effects Loop

#### 3. Send

For connection to the input of an external effects processor.

#### 4. Return

For connection from the output of an external effects processor.

#### 5. Loop Level

The loop level on the DSL 100 and DSL 50 can be adjusted to match either floor pedals, requiring a low level or effects processors which require a high level.

### Loudspeaker Outputs

With all valve amplifiers it is imperative that the amp is connected to a load whilst in operation and that the impedance selected on the amp matches the total impedance of the speaker cabinet(s) being used.

Failure to comply with these points will result in damage to the amplifier.

The DSL 100 and DSL 50 feature three outputs, a dedicated 16 Ohm output and two outputs selectable between 4 and 8 Ohms.

The DSL 100 and DSL 50 should not be run into an impedance less than 4 Ohms.

#### 6. 16 Ohm Output

For the connection of a 16 Ohm speaker cabinet. It should be noted that when this Speaker Output is in use the remaining Speaker Outputs, items 7 and 8, will become inoperational.

#### 7. & 8. 4 & 8 Ohm Outputs

For use when the total impedance of speaker cabinets used is either 4 or 8 Ohms. That is, when using either a single 4 Ohm cab, a single 8 Ohm, two 8 Ohm cabs or two 16 Ohm cabs.

#### 9. Impedance Selector

Allows selection of 4 or 8 Ohms impedance for items 7 & 8. See Loading Points.

#### 10. Mains fuse

See rear panel for correct value.

#### 11. Mains Input

Your amp is provided with a detachable mains (power) lead which is connected here. The specific mains input voltage rating that your amplifier has been built for is shown on the back panel. Before connecting for the first time, please ensure that your amplifier is compatible with your electricity supply. If you have any doubt, please get advice from a qualified person. Your Marshall dealer will help in this respect.

#### 12. H.T. fuse

See rear panel for correct value.

### Loading Points

- One 4 Ohm cabinet, set to 4 Ohms
- One 8 Ohm cabinet, set to 8 Ohms
- Two 8 Ohm cabinets, set to 4 Ohms
- Two 16 Ohm cabinets, set to 8 Ohms

N.B. Always ensure that proper speaker leads are used to connect speakers to the DSL 100 and DSL 50, not guitar leads!

## WARNING !

**WARNING : RISK OF HAZARDOUS ENERGY!**  
**AVIS : ENERGIE ELECTRIQUE DANGEREUSE!**



If loudspeaker is disconnected a high voltage can be present at these output terminals. Operation in this manner can damage your amplifier, therefore ensure that loudspeaker is properly connected.

Your amp should be completely powered down before changing loads.